


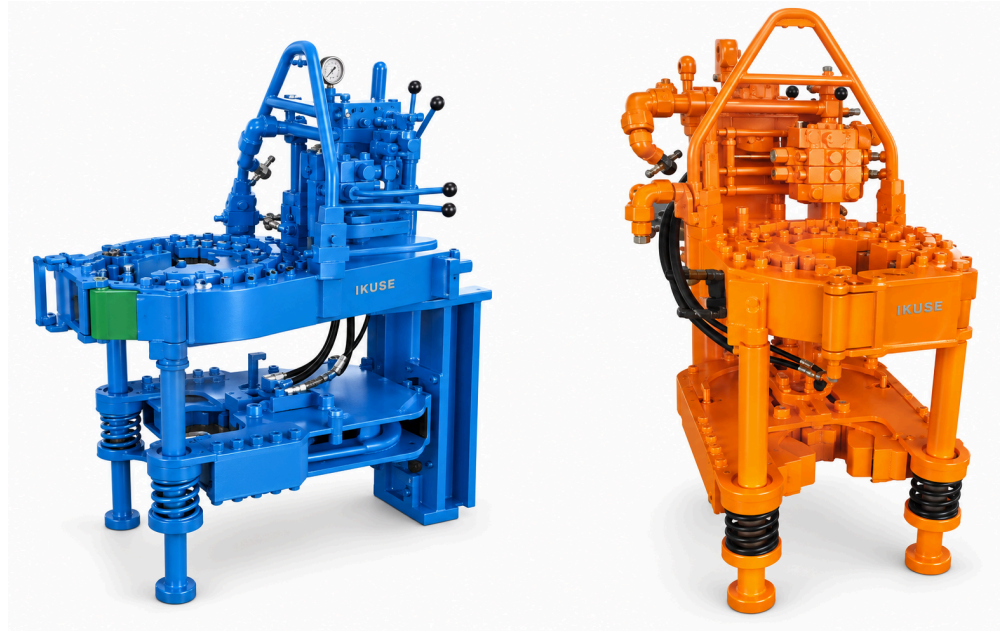

Overview

Hydraulic tubing tong with an integral gear-ring gripping head for workover make-up and break-out.

Selection

Select by equipment model, pipe diameter, rated load or torque, and connection dimensions. Check each size within the same series separately.

Technical Specifications

S/N	Parameters	Model	XQ140/28
1	Pipe O.D.	mm	Φ60.3-140
		in	2-3/8 ~ 5-1/2
2	Rated working pressure of hydraulic system	MPa	17.5
		psi	2500
3	Rated flow of hydraulic system	L/min	300
		gpm	80
4	Max. torque of low gear	N.m	28500
		ft.lbs	21000
5	Max. torque of high gear	N.m	7080
		ft.lbs	5220
6	Rotation speed of tong head	High gear rpm	72
		Low gear rpm	15.5
7	Boundary dimension	mm	1280×610×1330
		in	50.4×24×52.4
8	Weight	kg	900
		lb	1975
Remarks		Hydraulic gear motor	